


Propane Tanks Above Ground

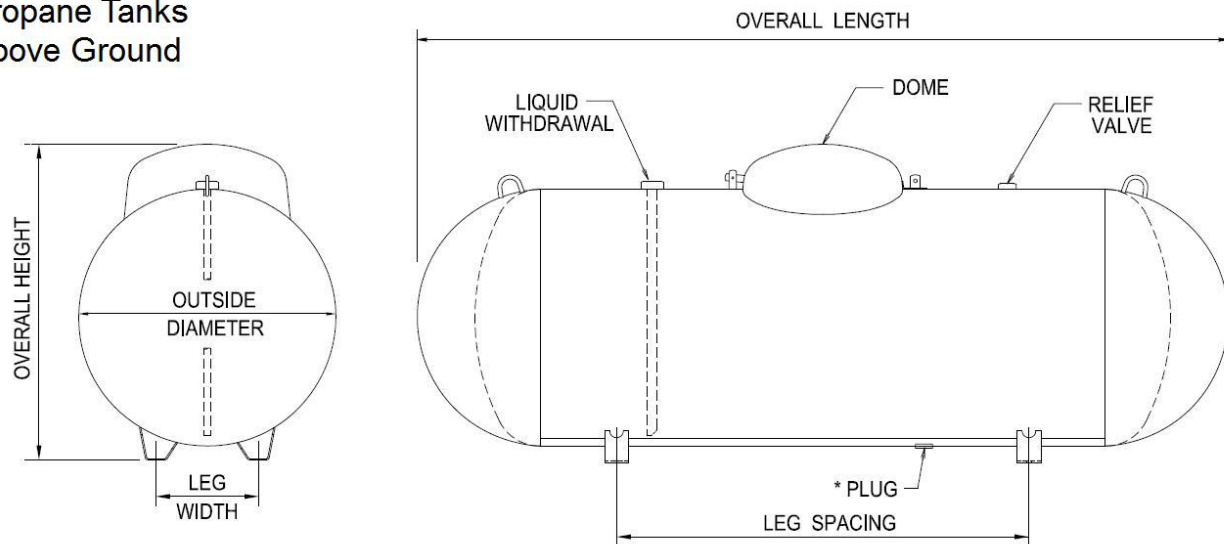


General Specifications

Conforms to the last edition and addenda of the ASME code for Pressure Vessels, Section VIII, Division 1. Complies with NFPA 58.

Rated at 250 psig from -20° F. to 125° F. All tanks may be evacuated to a full (14.7 psi) vacuum.

Vessel Finish: Coated with TGIC powder.

Liquid withdrawal opening located under the dome on the 120wg vessels ONLY.

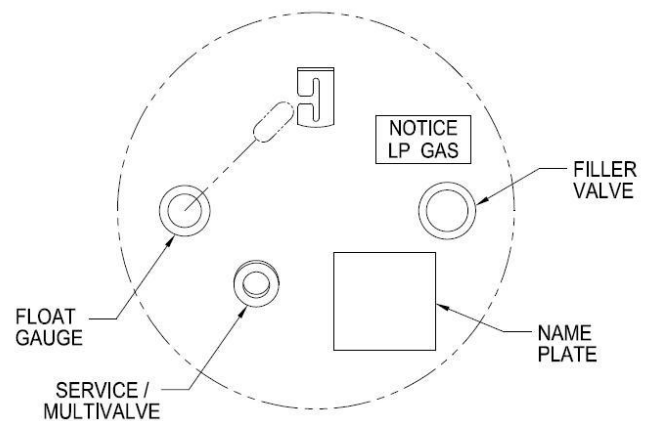


ABOVEGROUND VESSEL DIMENSIONAL INFORMATION

All vessels dimensions are approximate

WATER CAPACITY	OUTSIDE DIAMETER	HEAD TYPE	OVERALL LENGTH	OVERALL HEIGHT	LEG WIDTH	LEG SPACING	WEIGHT (APPROX.)	QUANTITY IN FULL LOAD
* 120 wg. 454.2 L	24" 609.6 mm	Ellip	5' - 5 13/16" 1671.6 mm	2' - 8 1/4" 819.2 mm	10 1/8" 257.2 mm	3' - 0" 914.4 mm	250 lbs. 113.4 kg.	96
* 250 wg. 946.3 L	31.5" 800.1 mm	Hemi	7' - 2 1/2" 2197.1 mm	3' - 3 3/4" 1009.7 mm	12 3/4" 323.9 mm	3' - 6" 1066.8 mm	480 lbs. 217.7 kg.	63
* 320 wg. 1211.2 L	31.5" 800.1 mm	Hemi	8' - 11 3/4" 2736.9 mm	3' - 3 3/4" 1009.7 mm	12 3/4" 323.9 mm	4' - 0 1/4" 1225.6 mm	600 lbs. 272.2 kg.	45
500 wg. 1892.5 L	37.42" 950.5 mm	Hemi	9' - 10" 2997.2 mm	3' - 9 11/16" 1160.5 mm	15" 381.0 mm	5' - 0" 1524.0 mm	910 lbs. 412.2 kg	30
1000 wg. 3785.0 L	40.96" 1040.4 mm	Hemi	15' - 10 13/16" 4846.6 mm	4' - 1 3/8" 1254.1 mm	16 1/4" 412.8 mm	9' - 0" 2743.2 mm	1750 lbs. 793.8 kg	15
1465 wg. 5545.0 L	46.77" 1188 mm	Ellip	17' - 6 7/8" 5356.2 mm	4' - 4 3/4" 1339.9 mm	21" 533.4 mm	10' - 0" 3048 mm	2820 lbs. 1279.1 kg	12
2000 wg. 7570.0 L	46.77" 1188 mm	Ellip	23' - 9" 7239 mm	4' - 7" 1709.7 mm	21" 533.4 mm	20' - 0" 6096 mm	3510 lbs. 1592.1 kg	8

Propane Tanks Underground

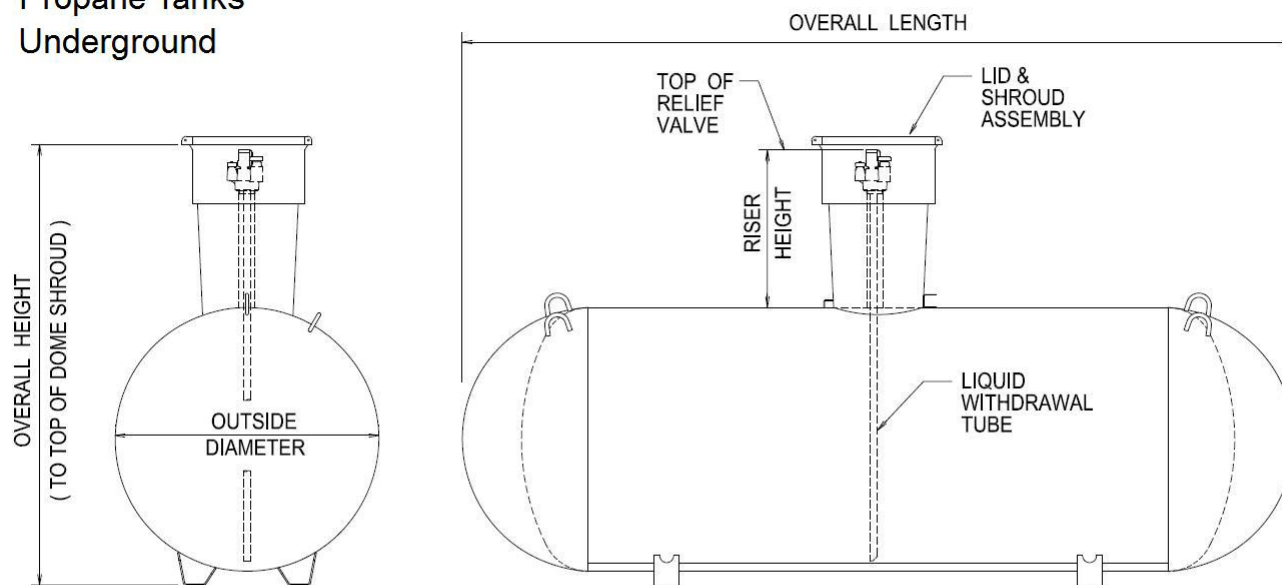

General Specifications

Conforms to the last edition and addenda of the ASME, Section VIII, Division 1. Complies with NFPA 58.

Container pressure rated at 250 psig from -20° F. to 125° F. All tanks may be evacuated to a full (14.7 psi) vacuum.

Vessel finish: Coated with TGIC red powder.

im.

Applicable federal, state or local regulations may contain specific requirements for protective coatings and cathodic protection. The purchaser and installer are responsible for compliance with all federal, state, or local regulations. Including proper purging for first fill per NGPA 133-89 (a)

UNDERGROUND VESSEL DIMENSIONAL INFORMATION							
All vessels dimensions are approximate							
WATER CAPACITY	OUTSIDE DIAMETER	HEAD TYPE	OVERALL LENGTH	OVERALL HEIGHT 14" Riser Height 28"		WEIGHT (APPROX.)	QUANTITY IN FULL LOAD
120 wg. 454.2 L	24" 609.6 mm	Ellip	5' - 5 7/8" 1673.2 mm	3' - 4 5/8" 1031.9 mm	4' - 6 3/4" 1390.7 mm	260 lbs. 117.9 kg.	63
250 wg. 946.3 L	31.5" 800.1 mm	Hemi	7' - 2 1/2" 2197.1 mm	4' - 0 5/8" 1235.1 mm	5' - 2 1/16" 1576.4 mm	490 lbs. 222.3 kg.	35
320 wg. 1211.2 L	31.5" 800.1 mm	Hemi	8' - 11 3/4" 2736.9 mm	4' - 0 5/8" 1235.1 mm	5' - 2 1/16" 1576.4 mm	610 lbs. 276.7 kg.	28
500 wg. 1892.5 L	37.42" 950.5 mm	Hemi	9' - 10" 2997.2 mm	4' - 6 1/2" 1384.3 mm	5' - 8 1/8" 1730.4 mm	920 lbs. 417.3 kg	25
1000 wg. 3785.0 L	40.96" 1040.4 mm	Hemi	15' - 10 7/8" 4848.2 mm	4' - 9 1/2" 1460.5 mm	6' - 0" 1730.4mm	1760 lbs. 798.3 kg	15
1465 wg. 5545.0 L	46.77" 1188 mm	Ellip	17' - 6 7/8" 5356.2 mm	5' - 3 7/8" 1722.4 mm	6' - 5" 1955.3 mm	2830 lbs. 1283.7 kg	8
2000 wg. 7570.0 L	46.77" 1184 mm	Ellip	23' - 9" 7239 mm	5' - 3 7/8" 1722.4 mm	6' - 5" 1955.3 mm	3520 lbs. 1596.6 kg	6